

102- Site Kalteng- PR 300015069 BALL VALVE & CHECK VALVE

Dear Sir or Madam

We are **PT** SKS Listrik Kalimantan inviting your company for bidding

We are **PT** SKS Listrik Kalimantan inviting your company for bidding

No Material	Description	QTY	UOM
20022990	BVALVE;FB,2P,2",PN16,FE,PNEU,CF8,CF8	5	PC
	BALL VALVE VALVE TYPE : FULL BORE 2PC VALVE SIZE : 2" PRESSURE RATting : 1.6 MPA / PN16 END CONNECTION : FLANGE END OPERATING TYPE : PNEUMATIC BODY MATERIAL : CF8 (SS304) VALVE STEAM : CF8 (SS304)		
20022991	BVALVE;FB,2P,4",PN16,FE,PNEU,CF8,CF8	2	PC
	BALL VALVE VALVE TYPE : FULL BORE 2PC VALVE SIZE : 4" PRESSURE RATting : 1.6 MPA / PN16 END CONNECTION : FLANGE END OPERATING TYPE : PNEUMATIC BODY MATERIAL : CF8 (SS304) VALVE STEAM : CF8 (SS304)		
20003199	CHVALVE;SW,DN80,PN10,FE,WCB,WCB	2	PC

	CHECK VALVE TYPE : SWING VALVE SIZE : DN80 PRESSURE RATING : 1 MPa (PN10) CONNECTION TYPE : FLANGE END BODY MATERIAL : CARBON STEEL (WCB) SEAT MATERIAL : CARBON STEEL (WCB)		
--	--	--	--

NOTE: Price per items already include the freight cost to our site.

Overseas Vendor must provide the Import declaration documents (PIB=Pemberitahuan Import Barang)

Payment Term : 30 days after invoice dan **Good Received (MANDATORY)**

Delivery Term : DDP PT. SKS Listrik Kalimantan SITE

Desa Tumbang Kajuei, Kecamatan Rungan, Kabupaten Gunung Mas, Kalimantan

NOTE: Please attached the technical data sheet within the quotation and Customer References.

Delivery Time : (please input)

Guarantee :

The Proposal (Quotation) submit to Procurement by latest 6 January 2026 before 17:00 PM (Jakarta time)

Please send your quotation as follow:

To : wedi@dsspower.co.id

CC: zhao.peng@dsspower.co.id ; liu.bei@dsspower.co.id ;

ferdinand.hartono@dsspower.co.id ; fina.maulidiya@dsspower.co.id ;

Please set your Email Subject as follow:

"HO Kalteng- Bidding PR 300015069 BALL VALVE & CHECK VALVE"

Terima kasih

Best Regards,

Wedi







止回阀
型号 H46H 压力 1.0MPa 口径 DN80
温度 40℃ 材质 铸钢
中国·良工阀门集团

641


DN80

100



止回阀
型号 H44H 压力 1.0 MPa 温度 ≤ 425 °C 材质 出厂日期 2015 年 8 月 80 号
中国·良工阀门集团

CHECK VALVE OF COOLING CWP

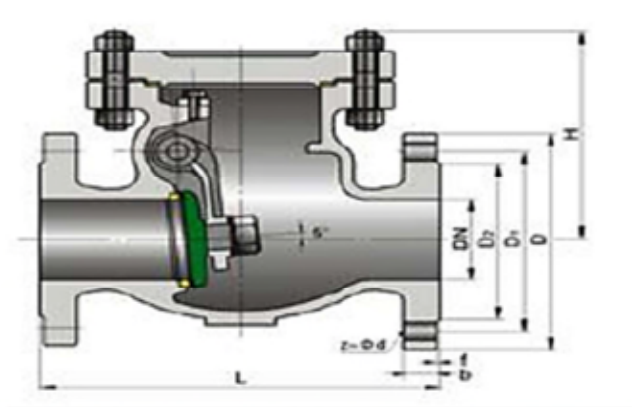

Description	Specification
Material	Carbon steel
DN	80
D1	160 mm
L	305
Service	Water cooling
Working temp	Max 35 °C

